


API 610 PROCESS PUMP

PUMP MODEL

SPR/SPRB

Catalog No. CS1833E*

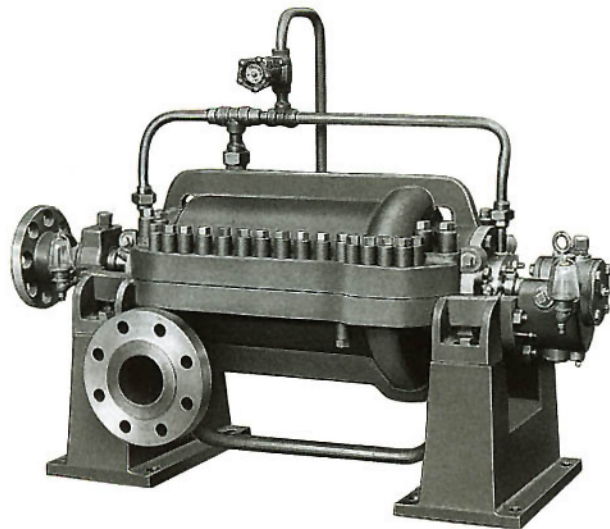

Design

Near Centerline support, Axial split
Multistage, Diffuser type casing
Tandem impeller arrangement for SPR
Opposed impeller arrangement for SPRB
Full compliance with API 610

Application

Pipeline, Crude Oil Transfer
Petroleum refinery,
Petrochemical Industry
Other Industries

Rating

Capacity	upto 180 m ³ /h (790 U.S.gpm)
Head	upto 1500 m (4920 ft)
Temperature	upto 205°C (400°F)
Flange Rating	upto ANSI Class 900 lb Others are also available