


API 610 PROCESS PUMP

PUMP MODEL

SP/SPD

Catalog No. CS1830E*

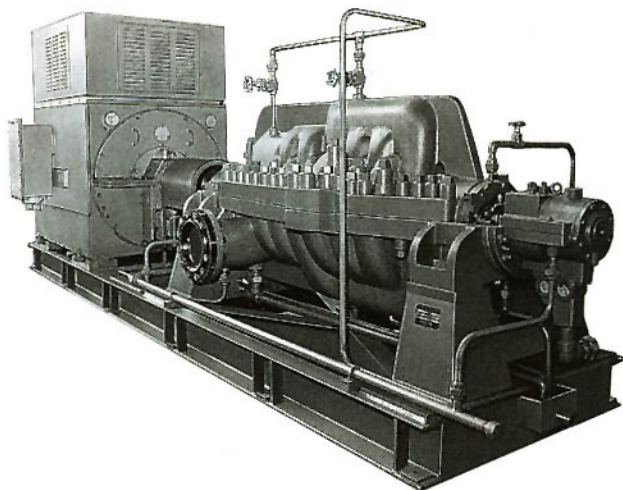

Design

Near Centerline support, Axial split
Multistage, Double Volute casing
Opposed impeller arrangement
Double Suction 1st stage Impeller for SPD
Low NPSH performance for SPD
Full compliance with API 610

Application

Pipeline, Crude Oil Transfer
Petroleum refinery,
Petrochemical Industry
Other Industries

Rating

Capacity	upto 4200 m ³ /h (18550 U.S.gpm)
Head	upto 1500 m (4920 ft)
Temperature	upto 205 C (400 F)
Flange Rating	upto ANSI Class 2500 lb Others are also available