


GENERAL SERVICE PUMP

PUMP MODEL

SS/SSD

Catalog No. CS1821E*

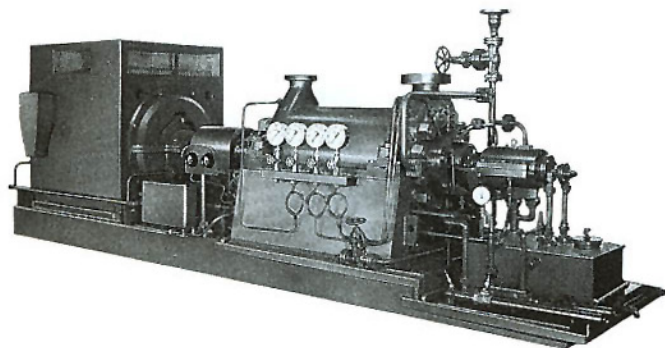

Design

Centerline support, Ring section
Multistage, Diffuser type casing
Tandem impeller arrangement
Double suction 1st impeller for SSD
Low NPSH performance for SSD

Application

Boiler Feed
Processing Water
Other Industries

Rating

Capacity	upto 720 m ³ /h (3170 U.S.gpm)
Head	upto 2500 m (8200 ft)
Temperature	upto 250 C (480 F)
Flange Rating	upto ANSI Class 2500 lb Other Standards are also available