



**SELF PRIMING PUMPS**
**FQ & FQD**



FQ




FQD

**FEATURES**

- **Self priming pump** ; Priming required for initial use only.
- **Enclosed impeller ensures high efficiency**
- **Fast pumping action** ; Special designed casing provides very fast action.
- **BPO (back pull out) system** ; Over haul without suction/discharge pipe removal.
- **Non-overload design** ; Ensures stable performance for all applications
- **Sealed ball bearing** ; Eliminates need of lubrication.
- **Compact construction** ; The two-pole high speed motor provides a compact unit and minimizes installation area.
- **403 Stainless steel shaft** ; Portion of shaft contacting liquid is made of 403 stainless steel and is highly resistant to wear.

**SELF PRIMING MULTI-STAGE PUMPS**
**FMQ**
**FMQ**

**FEATURES**

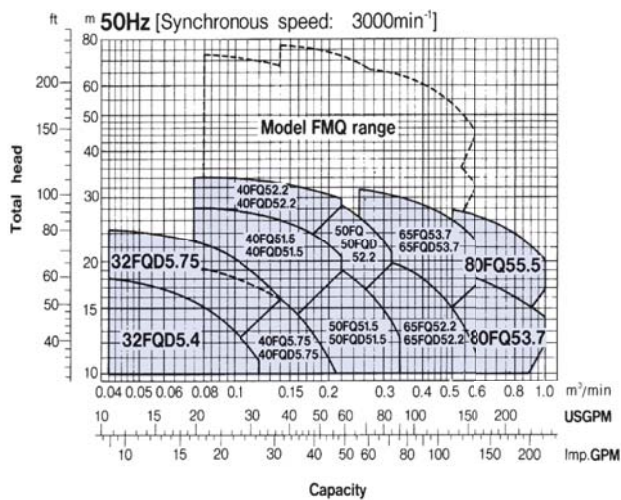- Energy saving due to high efficiency
- Compact size
- Easy maintenance
- Robust self-priming design
- Higher head possible

**SELECTION CHART**

**SELECTION CHART**

 3000 min<sup>-1</sup>
