



QUALITY Stainless Steel Submersible Pumps

Type RIGHT

APPLICATIONS

- General submersible pumping
- Draining filtered water
- Handling drain water
- Emptying pits and discharge into sewers
- For automatic dirty water pump stations
- Supplied with 10m cable length type H07RNF
- Available with or without float switch

SPECIFICATIONS

- Maximum liquid temperature : 50°C
- Maximum immersion : 10m
- Maximum passage of solids : 35mm


MATERIALS

- Pump casing, impeller, cover, casing cover and motor casing in AISI 304
- Shaft in AISI 303
- Double mechanical seal with interposed oil chamber: upper in carbon/ceramic/NBR, lower in SiC/SiC/NBR

FEATURES / BENEFITS

- Asynchronous 2 poles motor
- Insulation class : F
- Protection degree : IP68
- 1~230V \pm 10%, 50Hz-3~400V \pm 10%, 50Hz
- Permanent split capacitors and automatic thermal overload protection for single-phase version
- Thermal protection to be provided by the user for three phase-version
- DNM 1"1/2




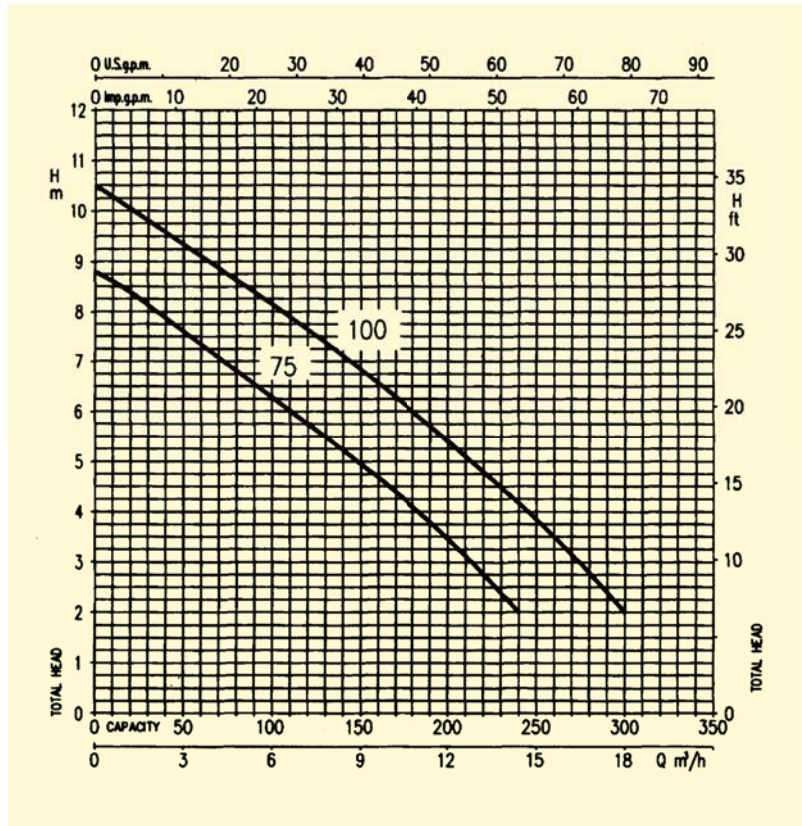

PERFORMANCE TABLE

Pump type		kW	Capacitor		Absorbed Current (A)		l/min m³/h	Q = Capacity							
Single-phase 230V 50Hz	Three-phase 400V 50Hz		μF	Vc	1~	3~		40	80	100	120	160	200	240	300
Right 75 M	Right 75	0.55	20	450	4.8	2.1	7.8	6.8	6.2	5.7	4.7	3.4	2	-	
Right 100 M	Right 100	0.75	31.5	450	5.7	2.6	9.5	8.6	8.1	7.6	6.6	5.4	4.2	2	

DIMENSION

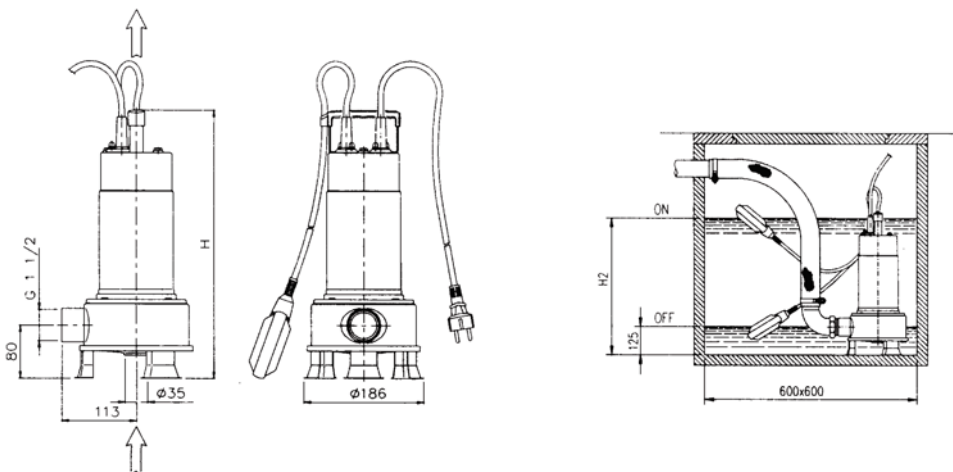

Pump type		(mm)		Weight Kg
		H	H2	
Right 75 M	Right 75	405	480	10
Right 100 M	Right 100	430	500	11.5

*All specifications are subject to change without prior notice.



EBARA Pumps Malaysia Sdn Bhd
 No.6, Jalan TP3, UEP Subang Jaya Industrial Park,
 47620 Subang Jaya, Selangor, Malaysia.
 Tel : 03-8023 6622 Fax : 8023 9355
 Email : sales@ebara.com.my
 Website : www.ebara.com.my



Authorised dealer: