




**SPECIFICATIONS**

Description		Standard	Option
Model		<b>CSA-V, CNA-V</b>	
Liquid Handled	Type of liquid	Clean Water, Industrial Water, River Water	
	Temperature	Below 80°C (176°F)	81°C-120°C (177°F-248°F) (only applicable for Mechanical Seal Models)
Max. Positive Suction Pressure		0.981 MPa	0.981 MPa
Allowable negative suction pressure		0.03924 MPa	
Construction	Shaft Seal	Mechanical Seal	Mechanical Seal
	Bearing	Ball Bearing	
	Lubrication	Grease	
Material	Casing	Cast Iron	
	Impeller	Bronze	
	Shaft	SUS 316	SUS 404
	Shaft sleeve		Bronze
Flange	Suction	JIS 16 KRF	
	Discharge	JIS 16 KRF	
Accessories			
Standard		Air vent piping, Mechanical Seal, flushing water piping, Lift bolts.	
Option		Common base, Anchor bolts, Shaft coupling.	

**TYPICAL METHOD FOR DISASSEMBLY & RE-ASSEMBLY**

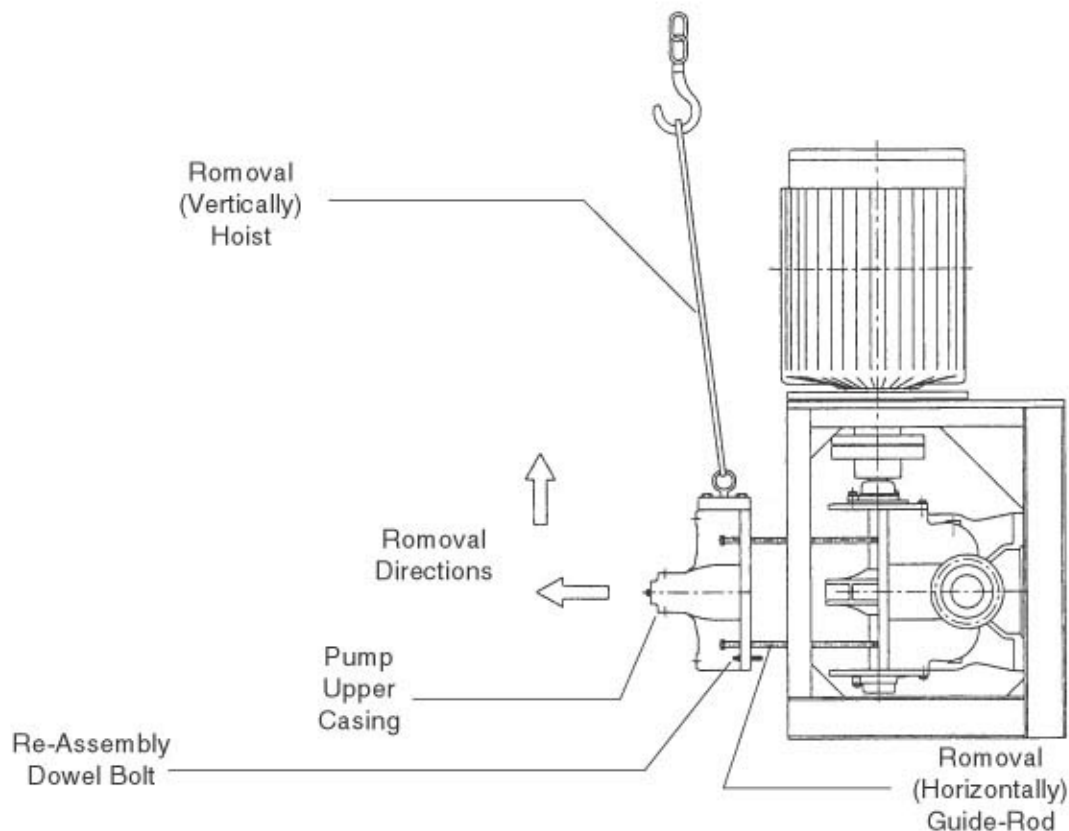

Note: All specifications are subject to change without prior notice.



**EBARA Pumps Malaysia Sdn Bhd**  
 20, Jalan Juruhebah U1/50, Temasya Industrial Park  
 40150 Shah Alam, Selangor, Malaysia.  
 Tel: 03-5569 1655 Fax: 03-5569 3766  
 Email: sales@ebara.com.my  
 Website: www.ebara.com.my

Authorized Dealer